

DAWN ENTERPRISES INC.

9155 Sweet Valley Dr., Valley View, OH 44125

Phone: (216) 447-1777 or (800) 548-4867

Fax: (216) 447-3416

www.Dawn-Ent.com

INSTALLATION INSTRUCTIONS

PART NUMBER: MUS15-FM

FOR: 2015+ FORD MUSTANG

EFFECTIVE: 6/22/2015

INSTALLATION PACKAGE INCLUDES:

- A) 2 – Paper Hole Locators
- B) 2 – Flat Washers
- C) 2 – M6- 5/8"
- D) Instruction Sheet

EXTRA TOOLS NEEDED:

- 1. 1/8" Drill Bit
- 2. Uni-Bit
- 3. Grease Pencil

PLEASE READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION

1. Remove Trunk Liner.
2. Place Sportwing® on vehicle's deck lid. Center Sportwing® from left to right. Each tip of the Sportwing® should measure 16 3/4" from the tip of the Sportwing® to the tip of the deck lid as shown in **Diagram A for Hardtop Models ONLY. For Convertible Models, please use DIAGRAM C's measurement (14 1/4")**. Then, proceed to make an outline around the Sportwing® with a grease pencil. Set Sportwing® aside on soft surface to prevent scratching.
3. Next, stick the 2 (two) hole locators onto the Sportwing® as shown in **Diagram B**. Afterwards, place the Sportwing® back onto the deck lid and tape the hole locators down to the deck lid. You will be drilling through these 2 (two) holes. Place Sportwing® aside on a soft surface until needed.
4. Next, drill through the hole locators using a 1/8" drill bit. Then, using a unibit, open the holes to 7/16". Afterwards, place Sportwing® back onto outline marks, making sure that the holes line up.
5. Then, remove red liner from Sportwing® to expose adhesive tape and place back onto deck lid. Press firmly to ensure adhesion. Next, while holding the Sportwing®, screw in the two m6-5/8" with 2 washers provided. Clean up any metal shavings and wipe off grease pencil marks to complete the installation process. For all questions, please call us toll free at 1-800-548-4867.

***FOR CONVERTIBLE MODELS:** Please note that the antenna on the Convertible Models will conflict with the Sportwing® in that you have to move the antenna around the Sportwing® whenever you open/close the trunk because of the length of the antenna. To avoid this, you can replace your antenna with a shorter, aftermarket antenna.

DIAGRAM B

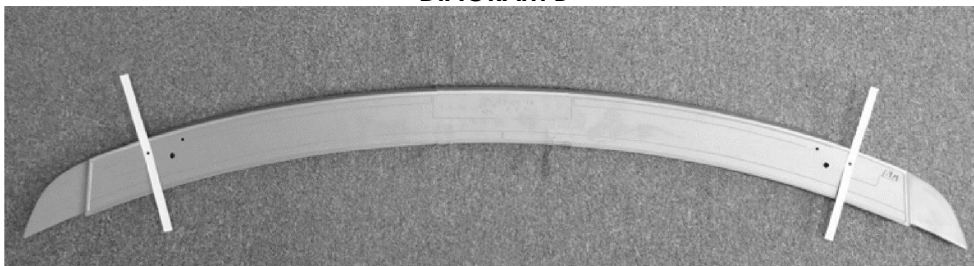


DIAGRAM A (HARDTOP)



DIAGRAM C (CONVERTIBLE)

