

## DAWN ENTERPRISES INC.

9155 Sweet Valley Dr., Valley View, OH 44125  
Phone: (216) 447-1777 or (800) 548-4867  
Fax: (216) 642-5505  
www.Dawn-Ent.com

## INSTALLATION INSTRUCTIONS

PART NUMBER: **CBM-300-06-07-08-09**  
FOR: 2014 Chevrolet Silverado/ GMC Sierra  
double cab & Dodge Ram Quad Cab  
EFFECTIVE: 5 April 2019

### PLEASE READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION

With the car & part in natural sunlight, check for paint match/flaws before installing.  
Once installed, parts are NOT returnable.

#### PARTS INCLUDED WITH INSTALL LOCATION:

- #306 (LABELED ON BACK OF PART) – 1 PIECE (DRIVER FRONT)
- #307 (LABELED ON BACK OF PART) – 1 PIECE (PASSENGER FRONT)
- #308 (LABELED ON BACK OF PART) – 1 PIECE (DRIVER REAR)
- #309 (LABELED ON BACK OF PART) – 1 PIECE (PASSENGER REAR)

#### 1. LOCATION (See Diagram below):

Run masking tape, **as shown using the measurements in the diagram below**, from POINT A to POINT B. Press tape against the vehicle, making sure that the tape is straight from POINT A to POINT B. **Repeat on other side of vehicle.**

#### Measurements for Chevrolet Silverado & GMC Sierra



#### Measurements for Ram




#### 2. CLEAN AND PREP:

Clean the surface where the molding is to be installed using the alcohol pads enclosed for proper installation of Chrome Body Side Molding. Wipe off excess residue with a clean cloth. Next, apply the **Pro Bond** promoter.

**TEMPERATURE:** Where cooler temperatures prevail, make sure the molding is at room temperature. The recommended metal surface temperature of the vehicle should be at least 75°F/24°C for proper installation. If the surface is cold, use a heat gun to warm before proceeding with installation.

**PROMOTER:** Supplied is a crush swab **Pro Bond** self-applicator. Squeeze the applicator until you feel the applicator "crush". When the applicator becomes wet on the end, it is ready for use. Quickly apply a thin coat of **Pro Bond** below the masking tape line, no further than 1 ¼" below the tape. Be careful not to go lower than 1 ¼" as **Pro Bond** could dull the paint surface. Wait for the coat of **Pro Bond** to dry before applying molding.

**DIAGRAM B:**  
(Starting Point)

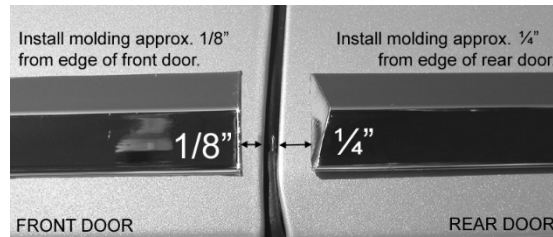

3. **INSTALLATION (IMPORTANT):**  
**Before starting, see Diagram B** as to where to start applying molding. Next, completely peel off all of the liner from back of molding, making sure all red liner is removed from molding. **DO NOT TOUCH** the exposed adhesive with your fingers as the installation is being done.
4. AFTER THE MOLDING has been installed, use a soft cloth and apply pressure along the entire length of the molding to insure proper adhesion.